


# ProPlex<sup>®</sup>

## PowerData DMX LV Cable PCCCT

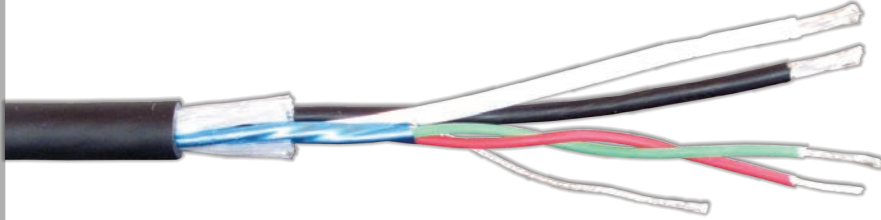

**Rugged, flexible  
combination DMX  
control and low voltage  
power cable.**

SPECIFICATIONS		
<b>Conductors</b>	Data pair: 22 AWG [0.34 mm <sup>2</sup> ] Tinned, annealed copper stranded 19 x 34	Power: 14 AWG [2.5 mm <sup>2</sup> ] Tinned, annealed copper stranded 41 x 30
<b>Insulation</b>	80° C, 300 Volt PVC	
	Data pair: Nom. wall: 0.012" [0.30 mm] Min. wall: 0.008" [0.20 mm]	Power: Nom. wall: 0.012" [0.30 mm] Min. wall: 0.009 [0.23 mm]
<b>Colour Code</b>	Data pair: Red/Green	Power: Black/White
<b>Assembly</b>	Power singles cabled around shielded data pair w/drain wire	
<b>Shield</b>	Aluminium / mylar around 22 AWG pair, aluminium in, 100% coverage	
<b>Drain</b>	22 AWG [0.34 mm <sup>2</sup> ] Tinned, annealed copper stranded 19 x 34	
<b>Jacket</b>	Black PVC Nom. wall: 0.040" [1 mm] Elongation: 300% Tensile strength: 2,000 psi UV and fungus resistant	
<b>Legend</b>	PROPLEX *PCCCT* POWERDATA LOW VOLTAGE CABLE 14 AWG 2/C + 22 AWG 1 PAIR CL2 (UL) E177741 FT1, UV RESISTANT INSTALLATION CABLE	
<b>Physical</b>	Outside diameter: 0.290" [7.37 mm] nom. Weight: 73 lbs. per 1,000 ft. [104 Kg/Km]	
<b>Temperature</b>	Plus 90° C, minus 20° C	
<b>Conductivity</b>	Data pair: 15.5 Ohms (max.) per 1,000 ft @ 20° C	Power: 2.75 Ohms per 1,000 ft @ 20° C nom.
<b>Characteristic Impedance</b>	Data pair: 60 Ohms	
<b>Capacitance</b>	Data pair: 25pf nom. cond.-to-cond, 44pf nom. cond.-to-shield	



**RoHS  
Compliant**

- Cable is RoHS compliant
- TMB UK and Canada cable assemblies RoHS compliant
- TMB US cable assemblies RoHS compliant by request

Innovative, Performance-Driven Show Technology Since 1983

tmb.com

Los Angeles

London

New York

Beijing

Toronto

+1 818-899-8818

+44 (0)20-8574-9700

+1 201-896-8600

+86 10-8492-1587

+1 519-538-0888

