

ProPlex[®]

FloppyDrive 24V

DMX Control for LED Neon, Tape, and
Other Low-Voltage Systems


BUILT FOR THE ROAD!
DATA DISTRIBUTION YOU CAN DEPEND ON



- 1, 2, 3, and 4 channel versions available
- Perfect for FloppyTape LED Tape and FloppyFlex LED Neon. Connect 2x 10-meter runs of 24V FloppyFlex or other 24V LED neon or tape (12 Watts/meter via professional connectors.)
- Two 12 or 24 VDC, 6A outputs
- Rugged, tour-ready ProPlex "Blue Box" PortableMount chassis. Packaged for extreme conditions. Shock-mounted circuitry. Advanced thermal management
- Color LCD Display with easy-function control buttons for easy setup and configuration
- Heavy-duty yoke for truss mounting. Optional RackMount Kit available.
- RDM functionality for complete system monitoring and addressing via RDM
- Self-healing overcurrent / short circuit protection

Great for
FloppyFlex
LED Neon

Great for
FloppyTape
LED Tape

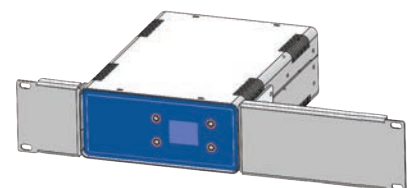

RackMount kit available

Worldwide Exclusive Distribution

Innovative, Performance-Driven Show Technology Since 1983

tmb.com

Los Angeles
+1 818-899-8818

London
+44 (0)20-8574-9700

New York
+1 201-896-8600

Beijing
+86 10-8492-1587

Toronto
+1 519-538-0888



Technical Specifications								
Part Number	PPFD24VP1	PPFD12VP1	PPFD24VP2	PPFD12VP2	PPFD24VP3	PPFD12VP3	PPFD24VP4	PPFD12VP4
Control Channels	1		2		3		4	
Control	DMX 512A + RDM							
AC Power	90-240 VAC, 50/60 Hz							
Output Power	24 VDC	12 VDC	24 VDC	12 VDC	24 VDC	12 VDC	24 VDC	12 VDC
Output Current	6 A max. per output							
Power Consumption	Up to 400 W							
Cooling	Passive/ Active							
Power connectors	PowerCON 20A IN/THRU							
DMX connectors	5-pin XLR IN/THRU							
Output connectors	2 SpeakON NL4							
DMX channels				3-12				
Unit Dimensions (HxWxD)	4.7 x 8 x 10.7" [120 x 202 x 272 mm] with yoke 3.4 x 8 x 10.7" [87 x 202 x 272 mm] without yoke							
Shipping Dimensions (HxWxD)	7.3 x 10.25 x 13.5" [186 x 261 x 343 mm]							
Unit Weight	8.75 lbs [3.98 kg]							
Shipping Weight	10.20 lbs [4.64 kg]							

