

ProStringer™





Portable Outlet Boxes

- Designed for the entertainment, event, facilities & construction industries.
- Extremely rugged non-conductive enclosure. Won't crack. Crush-proof.
- Molded from a unique thermoplastic polyester elastomer meeting all UL requirements for electrical enclosures.
- Much higher quality than typical rubber or plastic outlet boxes.
- Recessed receptacle protects outlets and flip covers from damage yet still allows flip covers to open 180° enabling the use of cube taps.
- Hex shaped opening prevents compatible strain relief from working loose.
- Compact all-black design is easy to conceal.
- Brass threaded inserts allow easy assembly and prevent damaged threads.
- 4 models to choose from:

POB	Standard Pass-Thru	* Fused models accept class CC midget fuses.
POB-D	Standard Pendant	
POBF	Fused Pass-Thru	
PODF-D	Fused Pendant	


- Build your own portable outlet box device using a wide range of available receptacles, covers, strain reliefs and other accessories. Contact your TMB dealer for details. Pre-wired assemblies also available.

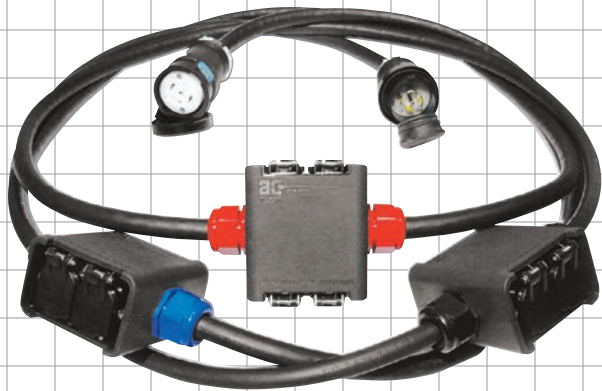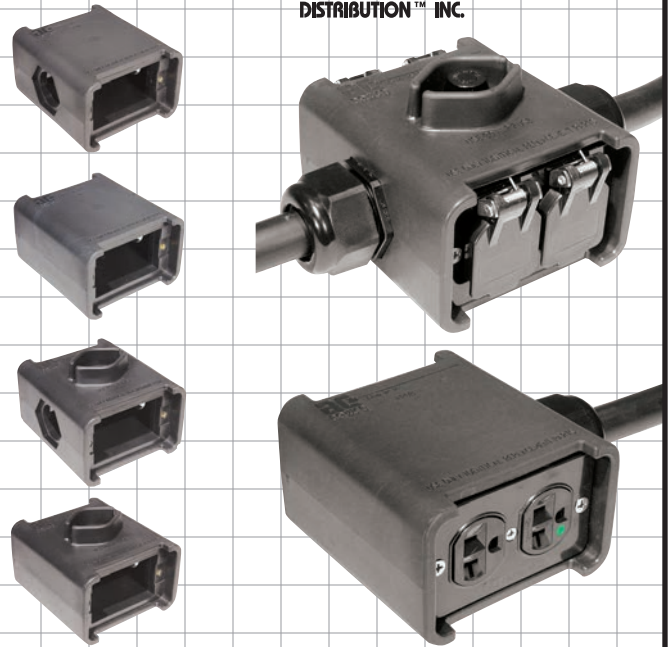

ProStringer™




- Perfect for distributing temporary power at any event or venue.
- cULus Listed assemblies. Numerous standard & custom configurations available.
- 20amp and 30amp versions meet NEC codes. Now you can legally use a 30amp plug to feed any typical booth stringer.
- Options include GFCI, flip covers & weather resistant versions.
- Color coded strain relief for easy phase identification.
- See back page to design your cULus Listed ProStringer.



ProPendant™



- Provides a quick and convenient way to tap temporary power systems.
- cULus Listed assemblies. Numerous standard & custom configurations available.
- 20amp and 30amp versions meet NEC codes.
- 3-phase versions are color coded for easy identification.
- Options include GFCI, flip covers & weather resistant versions.
- See back page to design your cULus Listed ProPendant.



cULus Listed Power Stringer & Power Pendant assemblies are sold as complete units and available only through select distributors.



Production Supplies & Services Worldwide

tmb-info@tmb.com

LOS ANGELES

LONDON

NEW YORK

BEIJING

TORONTO


Tel: +1 818.899.8818


Tel: +44 (0)20.8574.9700

Tel: +1 201.896.8600

Tel: +86 10.8492.1587

Tel: +1 519.538.0888

ProStringer™ 	Cable	Input/Feed-Thru Plug/Connector	Outlet Box Receptacles
20 amp 125v ProStringer®	12/3 SOOW	2pole 3wire Straight Blade or Locking Type NEMA 5-15 or 5-20	2pole 3wire Straight Blade or Locking Type NEMA 5-15 or 5-20
1 to 6 outlet boxes per assembly		Weatherproof plugs/connectors available	GFCI versions available
Standard spacing or custom lengths available			Weather resistant covers available
20 amp 125/250v ProStringer®	12/4 or 10/4 SOOW	3pole 4wire Straight Blade or Locking Type NEMA 14-20	2pole 3wire Straight Blade or Locking Type NEMA 5-15 or 5-20
2 or 4 outlet boxes per assembly		Weatherproof plugs/connectors available	GFCI versions available
Standard spacing or custom lengths available			Weather resistant covers available
20 amp 120/208v 3Ø ProStringer®	12/5 or 10/5 SOOW	4pole 5wire Locking Type NEMA 21-20	2pole 3wire Straight Blade or Locking Type NEMA 5-15 or 5-20
3 or 6 outlet boxes per assembly		Weatherproof plugs/connectors available	GFCI versions available
Standard spacing or custom lengths available			Weather resistant covers available
30 amp 125/250v ProStringer® - Fused	10/4 SOOW	3pole 4wire Straight Blade or Locking Type NEMA 14-30	2pole 3wire Straight Blade or Locking Type NEMA 5-15, 5-20, or 5-30
2 or 4 outlet boxes per assembly		Weatherproof plugs/connectors available	GFCI versions available
Standard spacing or custom lengths available			Weather resistant covers available
30 amp 120/208v 3Ø ProStringer® - Fused	8/5 SEOOW (Ultra-Compact 8/4-10/1)	4pole 5wire Locking Type NEMA 21-30	2pole 3wire Straight Blade or Locking Type NEMA 5-15, 5-20, or 5-30
3 or 6 outlet boxes per assembly		Weatherproof plugs/connectors available	GFCI versions available
Standard spacing or custom lengths available			Weather resistant covers available

ProPendant™ 	Cable	Input/Feed-Thru Plug/Connector	Outlet Box Receptacles
20 amp 125v ProPendant®	12/3 SOOW	2pole 3wire Straight Blade or Locking Type NEMA 5-15 or 5-20	2pole 3wire Straight Blade or Locking Type NEMA 5-15 or 5-20
1 outlet box per assembly		Weatherproof plugs/connectors available	GFCI versions available
3' Standard length or custom lengths available			Weather resistant covers available
20 amp 125/250v ProPendant®	12/4 or 10/4 SOOW	3pole 4wire Straight Blade or Locking Type NEMA 14-20	2pole 3wire Straight Blade or Locking Type NEMA 5-15 or 5-20
1 outlet box per assembly		Weatherproof plugs/connectors available	GFCI versions available
3' Standard length or custom lengths available			Weather resistant covers available
20 amp 120/208v 3Ø ProPendant®	12/5 or 10/5 SOOW	4pole 5wire Locking Type NEMA 21-20	2pole 3wire Straight Blade or Locking Type NEMA 5-15 or 5-20
1 outlet box per assembly		Weatherproof plugs/connectors available	GFCI versions available
3' Standard length or custom lengths available			Weather resistant covers available
30 amp 125v ProPendant® - Fused	10/3 SOOW	2pole 3wire Straight Blade or Locking Type NEMA 5-30	2pole 3wire Straight Blade or Locking Type NEMA 5-15, 5-20, or 5-30
1 outlet box per assembly		Weatherproof plugs/connectors available	GFCI versions available
3' Standard length or custom lengths available			Weather resistant covers available

Fully assembled configurations listed above are UL Listed for USA and Canada.

LITPROSTRINGER-053012 © TMB
© AC Power Distribution, Inc.

Fused assemblies include Class CC 600v 20amp fuse. Use equivalent replacements.

Other Non-UL Listed configurations, built to customer specifications, are available upon request.

Contact your local TMB dealer for details.

