


# ProPlex<sup>®</sup>

## Digital RGB Drive 24V

**BUILT FOR THE ROAD!**  
DATA DISTRIBUTION YOU CAN DEPEND ON

DMX control for **Digital FloppyFlex** LED Neon

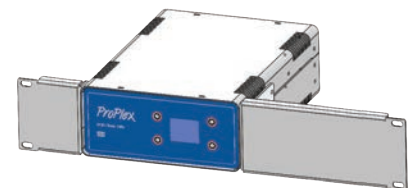

RackMount kit available

- Rugged, tour-ready ProPlex “Blue Box” PortableMount chassis. Packaged for extreme Conditions. Shock-mounted circuitry. Advanced thermal management
- Many onboard preprogrammed “looks” with RGB presets
- Perfect for Firefly FloppyFlex Digital RGB LED neon. Connect 1x 15-metre run of 24V.
- Colour LCD Display with easy function control buttons for easy setup and configuration
- Heavy-duty yoke for truss mounting. Optional RackMount Kit available.
- One 24VDC, FloppyFlex Digital RGB output
- RDM functionality for complete system monitoring and addressing via RDM
- Self-healing overcurrent / short circuit protection
- Neutrik connectors throughout

**Worldwide Exclusive Distribution**

Innovative, Performance-Driven Show Technology Since 1983

tmb.com

Los Angeles

London

New York

Beijing

Toronto

+1 818-899-8818

+44 (0)20-8574-9700

+1 201-896-8600

+86 10-8492-1587

+1 519-538-0888



Technical Specifications	
Control	DMX 512A + RDM
AC Power	90-240 VAC, 50/60 Hz
DC Power	24 VDC, 7.5 A max.
Power Consumption	Up to 180 W
Cooling	Passive/ Active
Power connectors	PowerCON 20A IN/THRU
DMX connectors	5-pin XLR IN/THRU
Output connectors	1 SpeakON NL4
DMX channels	3-360
Unit Dimensions (HxWxD)	4.7 x 8 x 10.7" [120 x 202 x 272 mm] with yoke 3.4 x 8 x 10.7" [87 x 202 x 272 mm] without yoke
Shipping Dimensions (HxWxD)	7.3 x 10.25 x 13.5" [186 x 261 x 343 mm]
Unit Weight	10.4 lbs [4.7 kg]
Shipping Weight	11.2 lbs [5.1 kg]

