


# ProPlex<sup>®</sup>

## RGB Drive 24V


DMX Control for RGB LED Neon, Tape,  
and Other Low-Voltage Systems

**BUILT FOR THE ROAD!**  
DATA DISTRIBUTION YOU CAN DEPEND ON

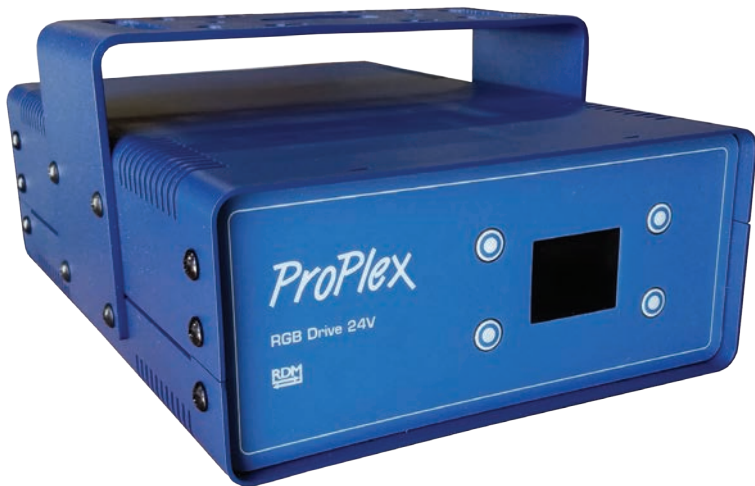

- Rugged, tour-ready ProPlex “Blue Box” PortableMount chassis. Packaged for extreme conditions. Shock-mounted circuitry. Advanced thermal management
- Many Onboard preprogrammed “looks” with RGB presets
- Perfect for Firefly FloppyFlex RGB LED Neon. Connect 2x 10-metre runs of 24V FloppyFlex or other 24V LED neon or tape (12 Watts/metre via professional connectors.)
- Colour LCD Display with easy-function control buttons for easy setup and configuration
- Heavy-duty yoke for truss mounting. Optional RackMount Kit available.
- Two 24 VDC, 6A RGB outputs
- RDM functionality for complete system monitoring and addressing via RDM
- Self-healing overcurrent / short circuit protection
- Neutrik connectors throughout

Great for  
**FloppyFlex**  
LED Neon

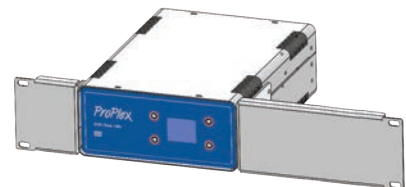

RackMount kit available

**Worldwide Exclusive Distribution**

Innovative, Performance-Driven Show Technology Since 1983

tmb.com

Los Angeles

London

New York

Beijing

Toronto

+1 818-899-8818

+44 (0)20-8574-9700

+1 201-896-8600

+86 10-8492-1587

+1 519-538-0888



Technical Specifications	
Control	DMX 512A + RDM
AC Power	90-240 VAC, 50/60 Hz
DC Output	24 VDC, 6 A max. per output
Power Consumption	Up to 400 W
Cooling	Passive/ Active
Power connectors	PowerCON 20A IN/THRU
DMX connectors	5-pin XLR IN/THRU
Output connectors	2 SpeakON NL4
DMX channels	3-12
Unit Dimensions (HxWxD)	4.7 x 8 x 10.7" [120 x 202 x 272 mm] with yoke 3.4 x 8 x 10.7" [87 x 202 x 272 mm] without yoke
Shipping Dimensions (HxWxD)	7.3 x 10.25 x 13.5" [186 x 261 x 343 mm]
Unit Weight	8.75 lbs [3.98 kg]
Shipping Weight	10.20 lbs [4.64 kg]

