



# FLARE LR Q+

The World Famous Flare in Linear Format!



Powered By



Featuring Flare Q+ LED Driver and Cooling Technology™! Delivers an amazing maximum output of 58,000 Lumens – 1.4 times the brightness of the original Flare – and QUIET!

- Famous Flare brightness, colours, control
- Patent Pending Preset Yoke™ included! Innovative indexing function, adjustable in 15-degree increments
- Attachable feet available for floor mounting
- “Theatre” (effectively silent) and “Turbo” (super-bright) modes

All the Great Features of Flare

**BRIGHT!** World famous Flare brightness. Nothing Brighter!

**SATURATED COLOURS!** Intense, deep reds and blues. Ultra-bright greens. Brilliant camera-friendly whites.

**SMOOTH!** Instantaneous RGBW colour mixing with 1200Hz refresh rate – Smooth on-camera dimming

**VERSATILE!** Pixel-map feature divides into 2, 3, 4, 6, or 12 sections for ultimate control

**FLEXIBLE!** 36-degree beam angle optimized for most applications. 22, 54, & 70-degree available by special order.

**SAVINGS!** Simultaneous colour wash, strobe, and blinder in ONE fixture – Saves labor, time, space, energy, and cost

Innovative, Performance-Driven Show Technology Since 1983

tmb.com

Los Angeles

London

New York

Beijing

Toronto

+1 818-899-8818

+44 (0)20-8574-9700

+1 201-896-8600

+86 10-8492-1587

+1 519-538-0888



# SPECIFICATIONS

Light sources	108 CREE® XML LEDs (divided in to 12 pixels)
Beam Spread	36°
Colours	4- R, G, B, W
Average colour wavelength (manufacturer rated)	red: 625 nm
	green: 530 nm
	blue: 460 nm
	white: >5700K
Refresh rate	1200 Hz
Intensity control	16bit or 8bit
Control	DMX-512 + RDM
AC Power	100-277 VAC Universal Input, 50/60 Hz
Cooling	active cooling
Operating Temperature	-20°C - +40°C
DMX Channels	3-56 depending on control mode
DMX Connectors	In/Out - XLR5 F/M
Max. power draw	1400 W
Power Connectors	In- PowerCON 20A blue
Fixing	Adjustable yoke
Unit Dimensions (HxWxD)	6.9 x 39.3 x 4.7 in (17.5 x 99.8 x 12 cm) without yoke
Shipping Dimensions (HxWxD)	TBD
Unit Weight	24.3 lb (11 kg)
Shipping weight	TBD

Specifications and features are subject to change without notice.




## PreSet™ Yoke

Included with fixture

Automatically snaps to 15° increments from -45° to +135°

Can also be manually set to any angle in between

Patent Pending

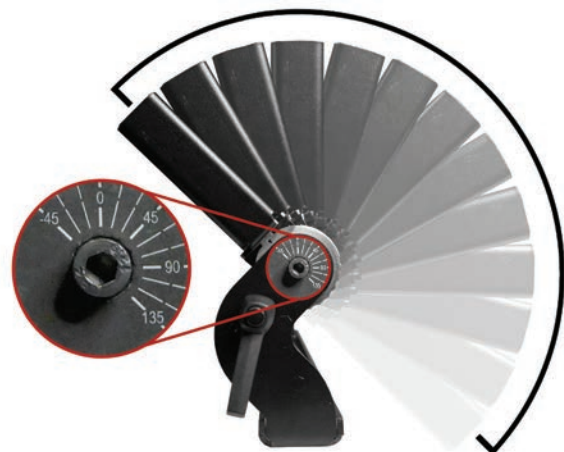

# DIMENSIONS

Dimensions in mm [inch]

